



AREA (SQFT): 605

US GAL: 20,250

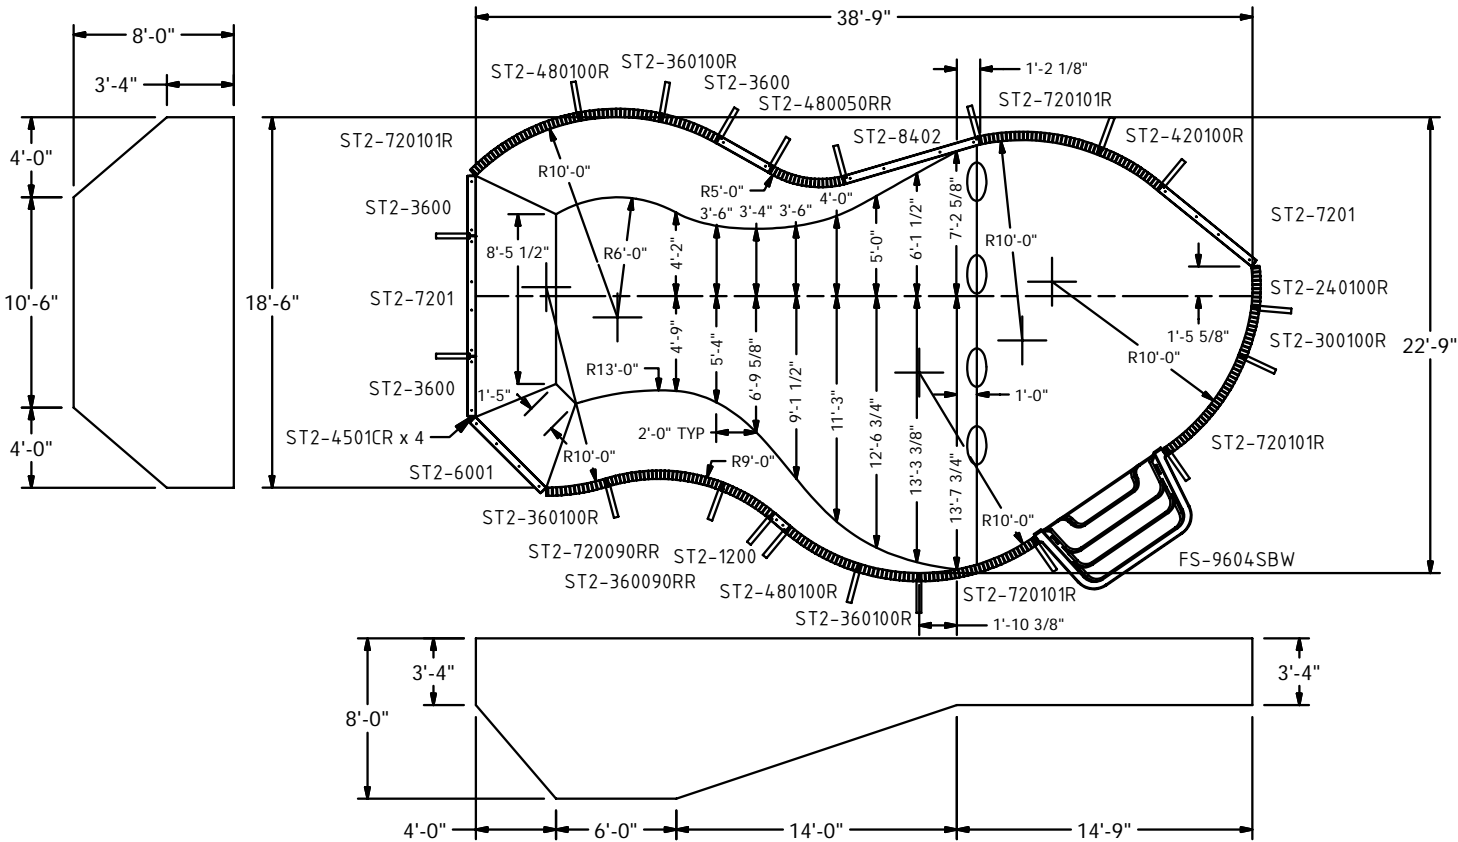


| MATERIALS |              |                                      |
|-----------|--------------|--------------------------------------|
| QTY       | PART #       | DESCRIPTION                          |
| 1         | FS-9604SBW   | Fbg Stp 8" Sit-Step 4Trd-Bull        |
| 1         | ST2-240100R  | Panel 24" x 10'R (2" Flange)         |
| 1         | ST2-300100R  | Panel 30" x 10'R (2" Flange)         |
| 1         | ST2-360090RR | Panel 36" x 9'R Rev (2" Flange)      |
| 3         | ST2-360100R  | Panel 36" x 10'R (2" Flange)         |
| 1         | ST2-420100R  | Panel 42" x 10'R (2" Flange)         |
| 1         | ST2-480050RR | Panel 48" x 5'R Rev (2" Flange)      |
| 2         | ST2-480100R  | Panel 48" x 10'R (2" Flange)         |
| 1         | ST2-720090RR | Panel 72" x 9'R Rev (2" Flange)      |
| 4         | ST2-720101R  | Panel 72" x 10'R - 1 Rib (2" Flange) |
| 1         | ST2-1200     | Panel 12" (2" Flange)                |
| 3         | ST2-3600     | Panel 36" (2" Flange)                |
| 1         | ST2-6001     | Panel 60" - 1 Rib (2" Flange)        |
| 2         | ST2-7201     | Panel 72" - 1 Rib (2" Flange)        |
| 1         | ST2-8402     | Panel 84" - 2 Ribs (2" Flange)       |
| 4         | ST2-4501CR   | Panel 45 Deg Corner - 1 Set          |
| 20        | ST-1018NAB   | Non-Adjustable Brace                 |
| 20        | ST-1020ENB   | Embedded Nut Brc                     |
| 20        | ST-1006DS    | Deck Support                         |
| 1         | HW-2002      | Hdw Steel/Rrd Kit                    |

| COPING |             |                                   |
|--------|-------------|-----------------------------------|
| QTY    | PART #      | DESCRIPTION                       |
| 1      | HW-2012     | Hdw No-Diving Plate (7/Bag)       |
| 1      | HW-1007     | Hdw 12x1" Tek Screws - 100/Box    |
| 1      | AT-1001W    | Alu Txt Clips Wht - 15/Bag        |
| 2      | AT-1441     | Alu Txt 12" Bull Std-Str - 1/Box  |
| 1      | AT-9601     | Alu Txt 8" Bull Std-Str - 1/Box   |
| 4      | AT-4501CR   | Alu Txt 45Dg-1"x1"Bull-CR - 1/Box |
| 1      | AT-960051R  | Alu Txt 8"x5'R Bull - 1/Box       |
| 2      | AT-960091RR | Alu Txt 8"x9'R Rev Bull - 1/Box   |
| 1      | AT-960104R  | Alu Txt 8"x10'R Bull - 4/Box      |
| 3      | AT-960101R  | Alu Txt 8"x10'R Bull - 1/Box      |



## NSPI SPECIFICATIONS

THIS IS DESIGNATED UNDER NSPI STANDARDS AS A TYPE II POOL

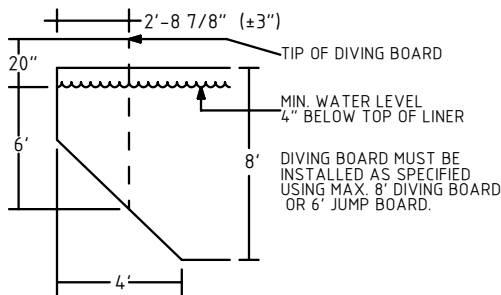

## NOTES

- All dimensions given are finished dimensions. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. The responsibility is the contractor's.
- All pools are designed consistent to the guidelines established by NSPI's publication, "Standards for Residential Pools". All pools must be constructed to these standards and your local building codes.
- A safety line, with buoys, is to be permanently attached 1'-0" to the shallow side of the point of first slope change. Different methods and precautions may be dictated by various ground conditions. This is to be determined by and is the responsibility of the contractor who is not an agent of the manufacturer of the compartments.
- Installation is to be done in accordance with all federal, state and local building codes, as well as A.N.S.I./N.S.P.I suggested standards. Bottom specifications must meet or exceed A.N.S.I./N.S.P.I./A.P.S.P recommended standards.



**NO DIVING** DANGER: DIVING MAY RESULT IN SERIOUS INJURY OR DEATH. Signage must be permanently attached around the perimeter of the pool.

-IT IS RECOMMENDED TO NOT INSTALL DIVING BOARDS AND/OR SLIDING EQUIPMENT ON RESIDENTIAL POOLS. If diving boards and/or sliding equipment is installed by the contractor, such diving boards and sliding equipment MUST BE INSTALLED WITHIN THE GUIDELINES ESTABLISHED BY ANS/NSPI/ASPA RECOMMENDED STANDARDS, AND IN ACCORDANCE WITH ALL APPLICABLE STATE AND LOCAL CODES AND REGULATIONS.

22'-9" X 38'-9" AUBURN LAKE


AREA (SQFT): 605

US GAL:20,250

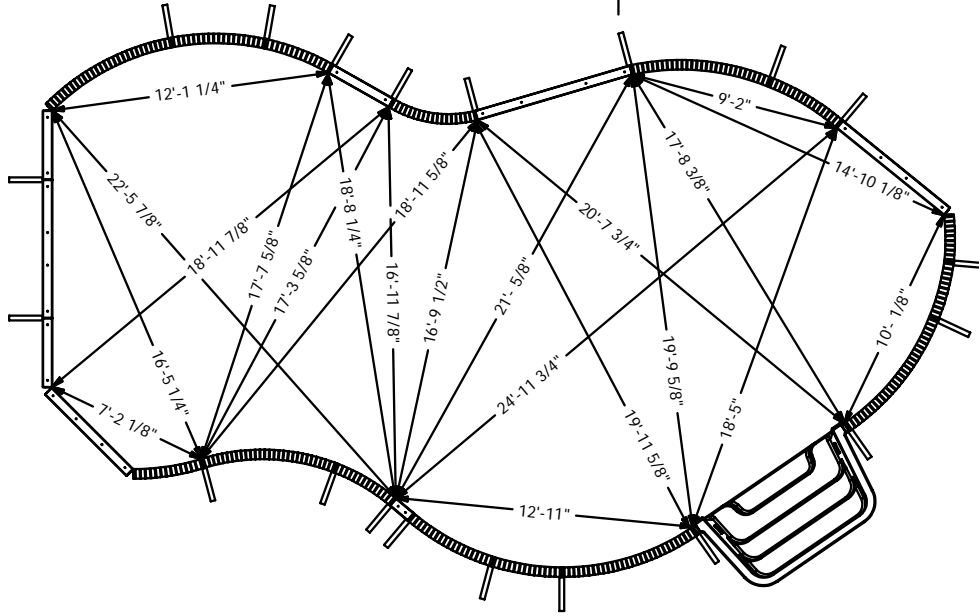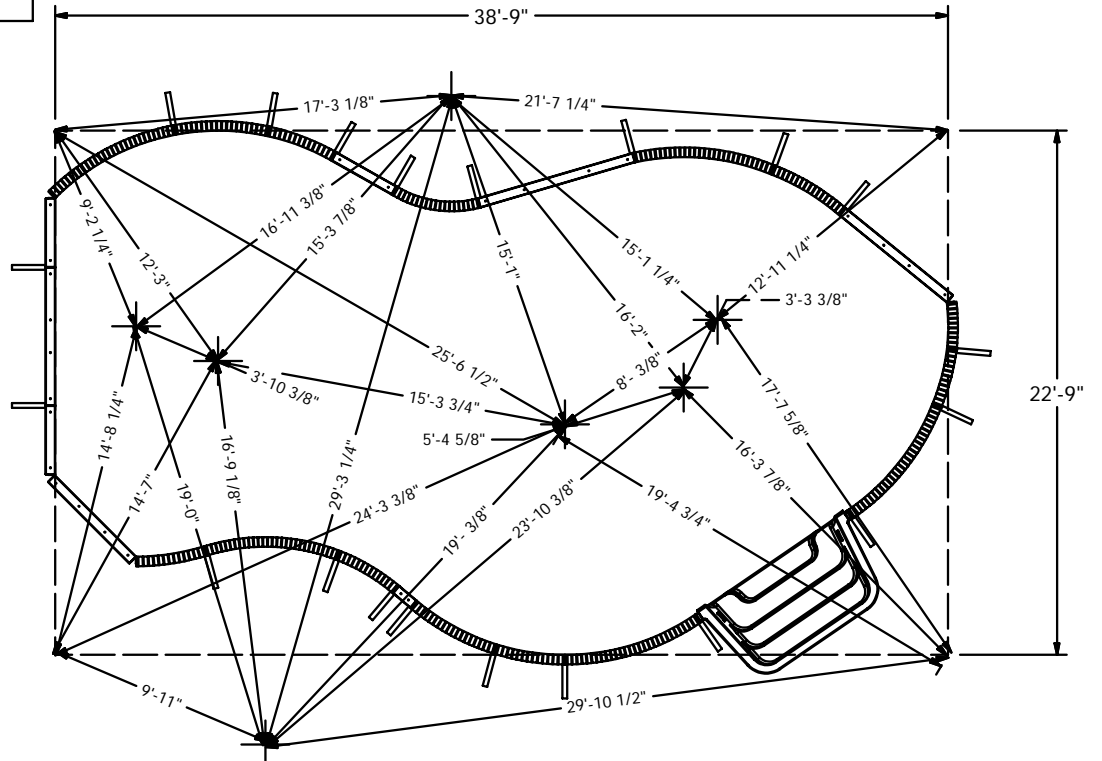

### NSPI SPECIFICATIONS

THIS IS DESIGNATED UNDER NSPI STANDARDS AS A TYPE II POOL

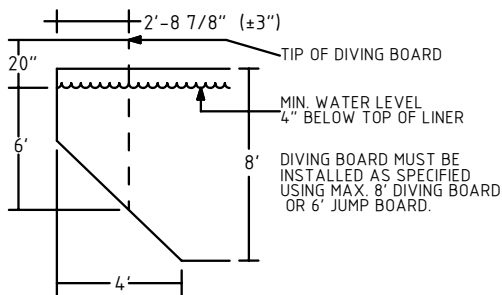

### NOTES

1. All dimensions given are finished dimensions. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. The responsibility is the contractor's
2. All pools are designed consistent to the guidelines established by NSPI's publication, "Standards for Residential Pools". All pools must be constructed to these standards and your local building codes.
3. A safety line, with buoys, is to be permanently attached 1'-0" to the shallow side of the point of first slope change. Different methods and precautions may be dictated by various ground conditions. This is to be determined by and is the responsibility of the contractor who is not an agent of the manufacturer of the comparts.
4. Installation is to be done in accordance with all federal, state and local building codes, as well as A.N.S.I./N.S.P.I suggested standards. Bottom specifications must meet or exceed A.N.S.I./N.S.P.I./A.P.S.P recommended standards.

**NO DIVING** DANGER: DIVING MAY RESULT IN SERIOUS INJURY OR DEATH.

-IT IS RECOMMENDED TO NOT INSTALL DIVING BOARDS AND/OR SLIDING EQUIPMENT ON RESIDENTIAL POOLS. If diving boards and/or sliding equipment is installed by the contractor, such diving boards and sliding equipment MUST BE INSTALLED WITHIN THE GUIDELINES ESTABLISHED BY ANS/NSPI/ASPA RECOMMENDED STANDARDS, AND IN ACCORDANCE WITH ALL APPLICABLE STATE AND LOCAL CODES AND REGULATIONS.

## 22'-9" X 38'-9" AUBURN LAKE

Signage must be permanently attached around the perimeter of the pool.